Jindara®

WOODHEATING

AUSTRALIAN DESIGNED & MANUFACTURED

10 YEAR FIREBOX WARRANTY

QUALITY THROUGH INTEGRITY

GASON HEATING

JINDARA WOODHEATING

QUALITY THROUGH INTEGRITY

Jindara Woodheating has been a key player in the Australian Woodheating industry for over 25 years. While many major brands have begun to source components and move production overseas, Jindara has consolidated its reputation as 100% Australian made and manufactured product by expanding its range of high quality woodheaters. Jindara have sought to continue to provide Australian families with a vibrant heat source that can be counted upon during the peak of winter.

Our expansive range covers styles to suit every home from traditional flat and bay window, to modernised / minimalistic woodheaters and dual-door heating options. Jindara also provides you with a range of installation options using our Zero Clearance Cabinets and Through-Wall Kits.

When you purchase a Jindara, you are investing in a high-quality Australian made product that is built to last under Australian conditions and you can rest assured in the knowledge your purchase is backed up by industry-leading after sales service and support. At Jindara, we believe that quality comes through integrity.

CONTENTS

MADE IN AUSTRALIA	3	DUAL-DOOR RANGE	12-13
OUTBACK SERIES	4-7	ZERO CLEARANCE & ELEVATED INSTALLATION	14
PARAMOUNT SERIES	8-9		
PLATINUM SERIES	10-11	SPECIFICATIONS	15-16

JINDARA WOODHEATING
MADE IN AUSTRALIA

Outback Series

The diversity offered by the Outback Series means that there is a model to suit every application in home heating. The range includes tried and tested models that have been a constant and reliable heat source for many Australian families for generations. From tall and easy to load flat window freestanding models, to the elegance of the bay window models - you can be sure there is a style to suit your needs.

Paramount Series

The Paramount Series has been the cornerstone of Jindara Woodheating for many years and for good reason. These cast-iron lined woodheaters with a simple traditional design can be trusted to keep your home warm on even the coldest of winter nights, year after year.

Platinum Series

Looking for something that is both visually striking and hard working? Look no further than the Jindara Platinum Series. These woodheaters will not only provide an elegant centrepiece for your living space all year round, they will ensure your house has a warm and cosy feel to it so you can relax in comfort.

Dual-Door Range

The Jindara Dual-Door Range gives you a variety of options in terms of size and style. The substantial heating capacity of the Duplicity is contrasted by the smaller Duo which is great for smaller homes. The pinnacle of woodheater design is showcased in the stunning Spectre models, which will provide gorgeous views of flickering flames to two areas of your home.

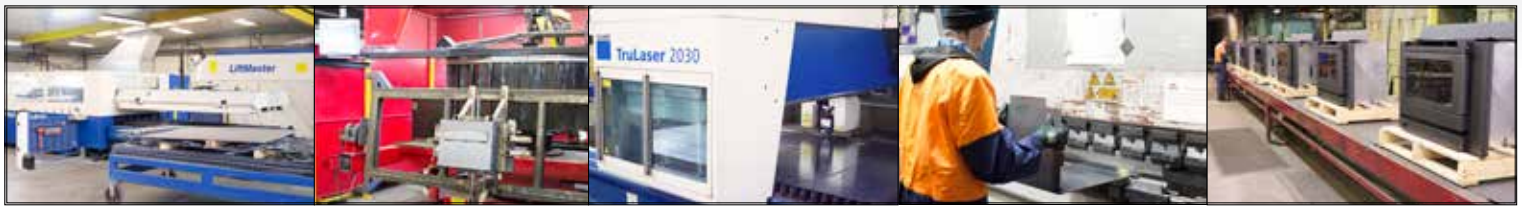

DID YOU KNOW?

Research conducted by the CSIRO found that firewood produces less greenhouse gas than all other domestic heating options. Australia's environmental standards relating to woodheating are the strictest in the world. This means burning wood in the modern efficient woodheaters provided by Jindara will produce less carbon than if the wood was left to naturally decompose on forest floor.*

*2003 CSIRO Study: Life Cycle Assessment of Greenhouse Gas Emissions from Domestic Woodheating

JINDARA WOODHEATING

OUTBACK SERIES - FREESTANDING

RIVERINA

- 3-Speed Fan
- Firebrick Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Tall Pedestal For Easy Loading

Capacity 180m²

Log Length 340mm

Flue Size 150mm

Efficiency 69%†

Emissions 0.9 g/kg

Output 14kW‡

BAROSSA

- 3-Speed Fan
- Firebrick Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Tall Pedestal For Easy Loading

Capacity 260m²

Log Length 410mm

Flue Size 150mm

Efficiency 72%†

Emissions 1.4 g/kg

Output 21kW‡

BARWON

- 3-Speed Fan
- Firebrick Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Tall Pedestal For Easy Loading

Capacity 320m²

Log Length 410mm

Flue Size 175mm

Efficiency 65%†

Emissions 1.3 g/kg

Output 24kW‡

JINDARA WOODHEATING

OUTBACK SERIES - FREESTANDING

SORRENTO

- 3-Speed Fan
- Firebrick Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Dual Pre-Heated Primary Air
- Cool-Touch Casing

Capacity 220m²

Log Length 450mm

Flue Size 150mm

Efficiency 73%†

Emissions 1.0 g/kg

Output 15kW‡

PYRENEES

- 3-Speed Fan
- Firebrick Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Dual Pre-Heated Primary Air
- Cool-Touch Casing

Capacity 300m²

Log Length 450mm

Flue Size 150mm

Efficiency 65%†

Emissions 1.3 g/kg

Output 17kW‡

MALLEE

- 3-Speed Fan
- Firebrick Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Dual Pre-Heated Primary Air
- Cool-Touch Casing

Capacity 350m²

Log Length 480mm

Flue Size 175mm

Efficiency 64%†

Emissions 2.4 g/kg

Output 22kW‡

JINDARA WOODHEATING

OUTBACK SERIES - FREESTANDING

STURT

- Boil & Simmer On Top Or Back Shelf
- Firebrick Lined
- Extra Deep Firebox For Easy Loading
- 10 Year Firebox Warranty
- Optional 3-Speed Fan

Capacity: 180m²
Log Length: 480mm
Flue Size: 150mm

Efficiency: 69%†
Emissions: 1.1 g/kg
Output: 16kW‡

COTTAGE

- Hot Plate For Boiling / Simmering
- Oven For Baking
- Firebrick Lined
- 8mm Steel Baffle Plate

Capacity: 120m²
Log Length: 340mm
Flue Size: 150mm

Efficiency: N/A
Emissions: N/A
Output: N/A

HOMESTEAD

- 3-Speed Fan
- Firebrick Lined
- 8mm Steel Baffle Plate
- Large Wood Storage Box
- Tall Unit & Easy To Load
- Identical Firebox To Riverina

Capacity: 180m²
Log Length: 340mm
Flue Size: 150mm

Efficiency: 69%†
Emissions: 0.9 g/kg
Output: 14kW‡

JINDARA WOODHEATING

OUTBACK SERIES - INSERT

RIVERINA

- 3-Speed Fan
- Firebrick Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Zero Clearance

Compatible, See Page 14 For More Information

Capacity: 160m²

Log Length: 340mm

Flue Size: 150mm

Efficiency: 72%†

Emissions: 0.9 g/kg

Output: 14kW‡

BAROSSA

- 3-Speed Fan
- Firebrick Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Zero Clearance

Compatible, See Page 14 For More Information

Capacity: 240m²

Log Length: 410mm

Flue Size: 150mm

Efficiency: 67%†

Emissions: 1.5 g/kg

Output: 17kW‡

BARWON

- 3-Speed Fan
- Firebrick Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Zero Clearance

Compatible, See Page 14 For More Information

Capacity: 280m²

Log Length: 410mm

Flue Size: 175mm

Efficiency: 65%†

Emissions: 1.4 g/kg

Output: 21kW‡

JINDARA WOODHEATING

PARAMOUNT SERIES - FREESTANDING

PILBARA

- 3-Speed Fan
- Cast Iron Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty

Capacity 120m²

Log Length 310mm

Flue Size 150mm

Efficiency 66%†

Emissions 2.2 g/kg

Output 6kW‡

KIMBERLEY

- 3-Speed Fan
- Cast Iron Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Minimal Clearances

Capacity 240m²

Log Length 420mm

Flue Size 150mm

Efficiency 69%†

Emissions 1.0 g/kg

Output 13kW‡

HAMERSLEY

- 3-Speed Fan
- Cast Iron Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty

Capacity 300m²

Log Length 420mm

Flue Size 150mm

Efficiency 64%†

Emissions 2.2 g/kg

Output 18kW‡

JINDARA WOODHEATING

PARAMOUNT SERIES - INSERT

KIMBERLEY

- ☑ 3-Speed Fan
- ☑ Cast Iron Lined
- ☑ 8mm Steel Baffle Plate
- ☑ 10 Year Firebox Warranty
- ☑ Zero Clearance
- Compatible, See Page 14 For More Information

Capacity: 220m²

Log Length: 310mm

Flue Size: 150mm

Efficiency: 65%†

Emissions: 0.3 g/kg

Output: 12kW‡

HAMERSLEY

- ☑ 3-Speed Fan
- ☑ Cast Iron Lined
- ☑ 8mm Steel Baffle Plate
- ☑ 10 Year Firebox Warranty
- ☑ Zero Clearance
- Compatible, See Page 14 For More Information

Capacity: 260m²

Log Length: 420mm

Flue Size: 150mm

Efficiency: 60%†

Emissions: 1.4 g/kg

Output: 16kW‡

FEDERATION

- ☑ 3-Speed Fan
- ☑ Cast Iron Lined
- ☑ 8mm Steel Baffle Plate
- ☑ 10 Year Firebox Warranty
- ☑ Alloy Fascia & Timber Mantle Option
- ☑ Zero Clearance
- Compatible, See Page 14 For More Information

Capacity: 260m²

Log Length: 420mm

Flue Size: 150mm

Efficiency: 60%†

Emissions: 1.4 g/kg

Output: 16kW‡

JINDARA WOODHEATING
PLATINUM SERIES - FREESTANDING & MODULAR

TILGA FREESTANDING

- Sleek & Modern Design
- 3-Speed Fan
- Cast Iron Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Dual Pre-Heated Primary Air
- Dual-Action Handle Latch
- Thermostatic Fan Control

Capacity 260m²
Log Length 280mm
Efficiency 80%†
Emissions 0.9 g/kg

GRANGE FREESTANDING

- Sleek & Modern Design
- 3-Speed Fan
- Cast Iron Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Dual Pre-Heated Primary Air
- Dual-Action Handle Latch
- Thermostatic Fan Control

Capacity 330m²
Log Length 410mm
Efficiency 76%†
Emissions 1.3 g/kg

TILGA MODULAR

- Sleek & Modern Design
- 1200mm Bench Option
- 3-Speed Fan
- Cast Iron Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- High Efficiency, Low Emissions
- Thermostatic Control

Capacity 260m²
Log Length 280mm
Efficiency 80%†
Emissions 0.9 g/kg

GRANGE MODULAR

- Sleek & Modern Design
- 1200mm Bench Option
- 3-Speed Fan
- Cast Iron Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- High Efficiency, Low Emissions
- Thermostatic Control

Capacity 330m²
Log Length 410mm
Efficiency 76%†
Emissions 1.3 g/kg

JINDARA WOODHEATING

PLATINUM SERIES - INSERT

TILGA	GRANGE
CAPACITY 240m²	CAPACITY 300m²
LOG LENGTH 280mm	LOG LENGTH 410mm
EFFICIENCY 74%†	EFFICIENCY 68%†
EMISSIONS 1.0 g/kg	EMISSIONS 1.4 g/kg

- Sleek & Modern Design
- 3-Speed Fan
- Cast Iron Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Huge Heating Capacity (Grange)
- Dual Pre-Heated Primary Air
- Dual-Action Handle Latch
- Thermostatic Fan Control

Masonry Insert - Fascia Depth 16mm
Zero Clearance Insert - Fascia Depth 3mm (Flush Fit)

THE JINDARA DIFFERENCE

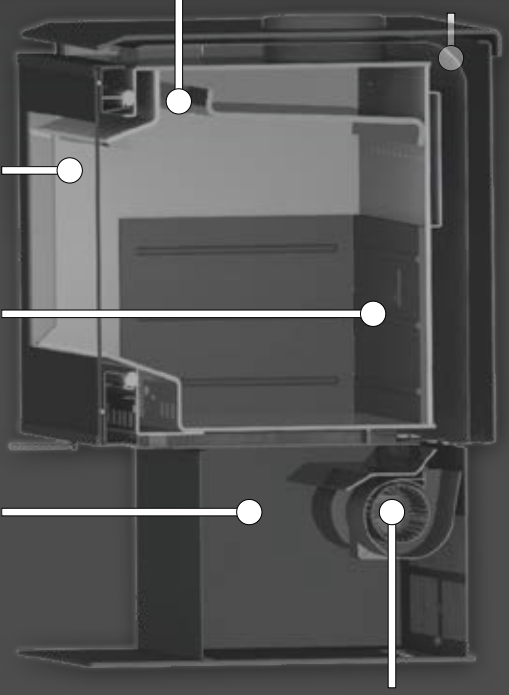

Powerful 3-Speed Fan for effective air circulation

Final combustion process

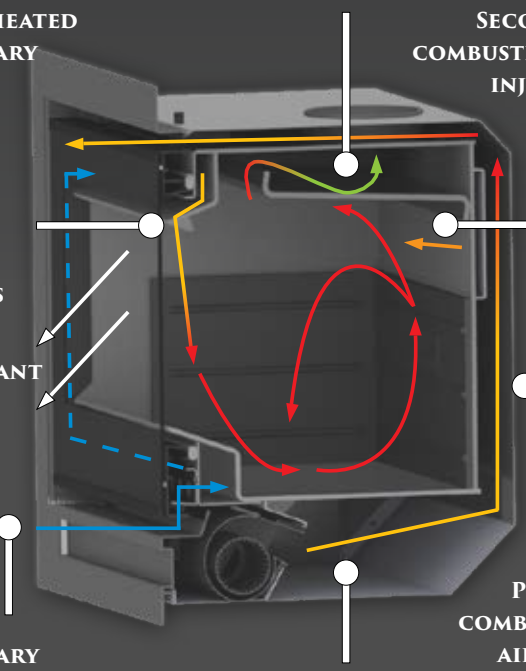

JINDARA WOODHEATING

DUAL-DOOR RANGE

DUO

- 2x 3-Speed Fans
- Firebrick Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Through-Wall Install & Masonry Cavity Install Options

Capacity: 280m²
Log Length: 710mm
Flue Size: 150mm
Efficiency: 67%†
Emissions: 2.4 g/kg
Output: 16kW‡

DUPLICITY

- 2x 3-Speed Fans
- Firebrick Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Through-Wall Install & Masonry Cavity Install Options

Capacity: 400m²
Log Length: 670mm
Flue Size: 175mm
Efficiency: 67%†
Emissions: 1.4 g/kg
Output: 24kW‡

SPECTRE FREESTANDING

- 2x 3-Speed Fans
- Cast Iron Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Dual-Action Handle Latch
- Thermostatic Fan Control
- Through-Wall Options Available

Capacity: 420m²
Log Length: 410mm
Flue Size: 175mm
Efficiency: 62%†
Emissions: 1.2 g/kg
Output: 14.9kW‡

JINDARA WOODHEATING

DUAL-DOOR RANGE

SPECTRE INSERT

- 2x 3-Speed Fans
- Cast Iron Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Dual-Action Handle Latch
- Thermostatic Fan Control
- Masonry Installation

Capacity: 400m²

Log length: 410mm

Flue size: 175mm

Efficiency: 62%†

Emissions: 1.2 g/kg

Output: 14.9kW‡

DESIGN SPACE

- Create a centrepiece for your home by installing a Spectre Insert into a masonry structure
- Through-Wall units may have additional flue installation requirements
- Contact your Jindara dealer for Through-Wall / Masonry Cavity specifications & guides

Spectre Freestanding Through-Wall Kit

Spectre Insert Masonry Cavity Kit

SPECTRE MODULAR

- 2x 3-Speed Fans
- Cast Iron Lined
- 8mm Steel Baffle Plate
- 10 Year Firebox Warranty
- Dual-Action Handle Latch
- Thermostatic Fan Control
- 1200mm Bench Option
- Through-Wall Options Available

Capacity: 420m²

Log length: 410mm

Flue size: 175mm

Efficiency: 62%†

Emissions: 1.2 g/kg

Output: 14.9kW‡

JINDARA WOODHEATING
ZERO CLEARANCE & ELEVATED INSTALLATION

ZERO CLEARANCE INSTALLATION

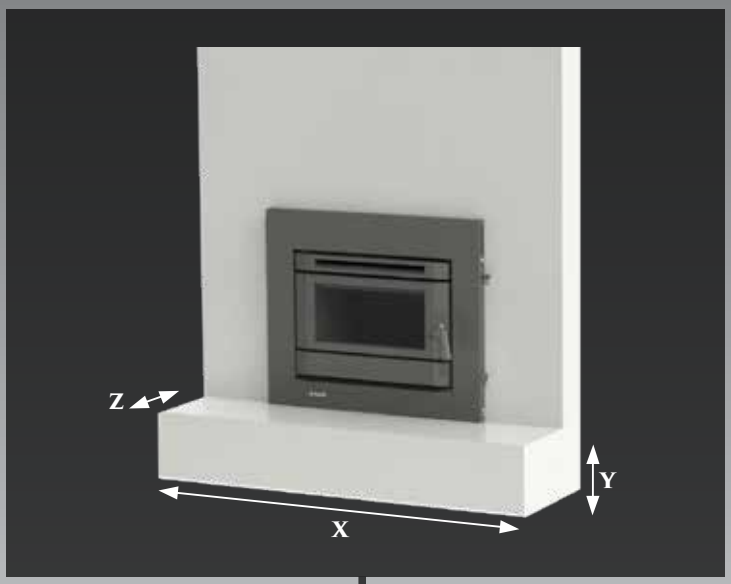

ELEVATED INSTALLATION

A MINIMUM HEARTH DEPTH OF 300MM CAN BE ACHIEVED BY RAISING THE WOODHEATER. USE THE FOLLOWING TABLE FOR REFERENCE (RAISED STEP TO BE NON-COMBUSTIBLE):

	REF	RIVERINA		BAROSSA		BARWON		TILGA		GRANGE	
HEARTH WIDTH	X	890mm (min.)		950mm (min.)		1280mm (min.)		945mm (min.)		1000mm (min.)	
HEARTH RAISED	Y	0mm	155mm (min.)	0mm	132mm (min.)	0mm	172mm (min.)	0mm	175mm (min.)	0mm	140mm (min.)
HEARTH DEPTH FROM FRONT OF FASCIA	Z	530mm (min.)	300mm (min.)	510mm (min.)	300mm (min.)	585mm (min.)	300mm (min.)	530mm (min.)	300mm (min.)	530mm (min.)	300mm (min.)

For further information in regards to raising your Insert or installing into a Jindara Zero Clearance Cabinet, please consult your local dealer or refer to the relevant installation instructions.

JINDARA WOODHEATING
SPECIFICATIONS

Dimensions & Clearances	Flue Type	Overall Dimensions Width/Height/Depth			Back of Woodheater to Flue Centre	Clearance to Combustibles			Minimum Hearth Size Width/Depth/Thickness			
Freestanding Models	**Solid / Perforated**	**W**	**H**	**D**	**mm**	**Rear**	**Side**	**Corner**	**W**	**D**	**T**	**mm in front of unit**
Riverina	Perforated	650	800	508	180	125*	325	150	890	960	12	400
Barossa	Perforated	710	937	570	180	150*	400	175	950	1050	18	400
Barwon	Perforated	782	1008	570	180	150*	450	200	1020	1100	20	450
Sorrento	Perforated	655	745	610	170	150	450	125	900	1070	4.5	300
Pyrenees	Perforated	775	795	595	165	100	330	50	1170	1020	4	300
Mallee	Perforated	850	825	620	180	100	350	50	975	1070	7.5	400
Sturt	Perforated	610	660	650	175	50	550	170	770	910	9	300
Cottage	Perforated	650	865	560	110	175	350	200	890	1095	12	350
Homestead	Perforated	660	870	508	180	175	400	225	890	985	6	350
Pilbara	Perforated	580	700	480	180	150	300	100	890	995	12	400
Kimberley	Perforated	707	760	570	185	100	250	25	940	940	9	300
Hamersley	Perforated	770	787	570	200	150	325	100	1020	1190	12	500
Tilga	Sol. / Perf.	690	765	548	205	155/50*	325	50/75	945	1000/895	9	300
Grange	Sol. / Perf.	748	828	548	205	50*	325	50	1000	895	9	300
Duo	Perforated	680	700	815	N/A	N/A	275	N/A	900	1750	6	500
Duplicity	Perforated	810	792	810	N/A	N/A	350	N/A	1000	1800	12	500
Spectre	Sol. / Perf.	695	765	745	N/A	N/A	330	N/A	940	1590	6	460

Dimensions & Clearances	Flue Type	Overall Dimensions Width/Height/Depth			Back of Woodheater to Flue Centre	Clearance to Combustibles			Minimum Hearth Size Width/Depth/Thickness			
Modular Models	**Solid / Perforated**	**W**	**H**	**D**	**mm**	**Rear**	**Side**	**Corner**	**W**	**D**	**T**	**mm in front of unit**
Tilga	Sol. / Perf.	690	635	548	205	155/50*	325	50/75	945	1005/900	140	330
Grange	Sol. / Perf.	748	676	548	205	50*	325	50	1000	895	140	330
Spectre	Sol. / Perf.	695	653	745	N/A	N/A	475	N/A	940	1890	32	570
Tilga Bench	Sol. / Perf.	690	635	548	205	155/50*	325	50/75	945	1005/900	140	300#
Grange Bench	Sol. / Perf.	748	676	548	205	50*	325	50	1000	895	140	300#
Spectre Bench	Sol. / Perf.	695	653	745	N/A	N/A	475	N/A	940	1375	6	300#

* Standard flue shield kit must be installed to achieve rear wall clearance (included in woodheater). # In front of bench.

JINDARA WOODHEATING

SPECIFICATIONS

FREESTANDING

TOP VIEW



FRONT VIEW



MODULAR

TOP VIEW



FRONT VIEW



INSERT

TOP VIEW



SIDE VIEW



Dimensions & Clearances	Overall Dimensions Width/Height/Depth			Rear Casing Dimensions			Clearance to Combustibles From Base of Appliance			Minimum Hearth Size				Back of Fascia to Flue Centre
										Masonry Installation			ZCC Install	
Insert Models	W	H	Fascia Depth	W	H	D	Side	To Mantle Shelf	To Breast Plate	W	D	T	mm in front of unit	mm
Riverina	882	750	42	570	595	365	50	1100	1040	890	530*	12	570ϕ*	232
Barossa	922	758	42	631	635	430	50	1390	1340	950	510*	12	550ϕ*	296
Barwon	994	828	42	700	706	430	40	1710	1560	1280	585*	25	625ϕ*	295
Kimberley	950	740	65	605	600	440	25	1170	1080	940	550*	18	610ϕ*	290
Hamersley	1010	750	105	665	630	430	150	1225	975	1000	600*	18	705ϕ*	257
Federation	1028	730	60	665	630	475	150	1225	975	1000	600*	18	660ϕ*	300
Tilga Masonry	855	640	16	751	595	484	55	1500ψ	1410	945	550*	18	550ϕ*	326
Tilga ZC	850	674	3	N/A	N/A	N/A	55	1500ψ	1410	945	N/A	18	550ϕ*	N/A
Grange Masonry	935	705	16	808	651	484	35	1500ψ	1410	1000	520*	18	520ϕ*	326
Grange ZC	930	736	3	N/A	N/A	N/A	35	1500ψ	1410	1000	N/A	18	520ϕ*	N/A
Spectre	875	692	16	751	644	708	205	1127	1127	940	1890*	32	570ϕ*	354

ψ Mantle deflector required, refer to the relevant installation instructions.

Note: The dimensions and clearances are for reference only. Refer to the Owner's Manual for operation and exact specifications prior to installation. Colours of woodheaters shown are as close as four colour process printing methods allow. Zero clearance options are available for all Insert models, consult your local dealer for further information. Installation should be carried out by a qualified installer. Flue kits to be installed strictly in accordance with AS/NZS 2918. All fireplace Inserts must be installed in a brick masonry chimney or Jindara Zero Clearance Cabinet and be fully flued. Jindara woodheaters conform to AS/NZS 2918, AS/NZS 4012/4013, however Jindara accepts no liability whatsoever for interpretation. All heating capacities quoted are based on units tested with quality hardwood. Performance reduction may result due to large glassed areas, vaulted ceilings, drafts or insufficient insulation. Jindara Woodheating reserves the right to change specifications without notice. All dimensions and clearances are in milimetres (mm). † Peak efficiency % quoted. ‡ kW output is peak power. * Minimum hearth depth in front of unit can be reduced by raising appliance above combustible materials (consult your local dealer or page 14 of this brochure). ϕ The hearth must be installed beneath and in front of Zero Clearance Cabinet (ZCC), refer to owners manual for exact specifications.

Jindara® WOODHEATING

AF Gason Pty Ltd
Phone: 03 9763 3200
Fax: 03 9763 0836
jindara@gason.com.au
www.jindara.com.au

Your Local Jindara Dealer

AUSTRALIAN HOME HEATING ASSOCIATION INC
M E M B E R

a sponsor of LANDCARE AUSTRALIA

Certified System Quality ISO 9001 SAI GLOBAL

GASON HEATING

QR CODE SCAN

GASON 05/18